

1S7WA_3RPR series

1W - Single Output DC-DC Converter - Isolated & Regulated



DC-DC Converter 1 Watt

- ⊕ SIP7 package
- ⊕ 2:1 input voltage range
- ⊕ Operating temperature range: -40°C to +100°C
- ⊕ 3000VDC isolation voltage
- ⊕ Up to 80% efficiency
- ⊕ Input under voltage protection
- ⊕ Short circuit protection (SCP)
- ⊕ Over current protection
- ⊕ MTBF: 1,000,000 hours

Introducing our new 2S7WA_3RPR series, a compact and robust isolated DC-DC converter platform engineered for dependable performance in industrial and distributed power applications. Designed in a space-efficient SIP7 package, the series features a wide 2:1 input voltage range, ensuring stable operation even under fluctuating supply conditions. With reinforced 3000 VDC isolation and efficiencies of up to 83%, the 2S7WA_3RPR series delivers reliable and efficient power conversion in demanding environments. It operates across an extended temperature range from -40°C to +100°C, supporting industrial-grade applications. Integrated input under-voltage protection, short circuit protection (SCP), and overcurrent protection provide comprehensive system-level safety and enhance overall operational reliability. An MTBF of 1,000,000 hours further underlines its suitability for long-life applications requiring stable and secure isolated power in a compact through-hole format.



| Common specifications | |
|----------------------------|----------------------------------------------------------------------------------------|
| Short circuit protection | Continuous, self recovery |
| Switching frequency | 300 kHz (PWM) |
| Operation temperature | -40°C ~+100°C (with derating) |
| Storage temperature | -55°C ~+125°C |
| Soldering Profile | Wave-soldering, 260°C (±5°C); time: 5-10s Manual-welding, 360°C (±10°C); time: 3-5s |
| Storage humidity | 5~95% RH (non-condensing) |
| MTBF: (MIL-HDBK-217F@25°C) | >1,000,000 hours |
| Input filter | Capacitance filter |
| Hot plug | Unavailable |
| Case material | Black plastic, flame-retardant and heat-resistant (UL 94V-0 rated) |
| Package dimensions | 19.60 x 7.05 x 10.10mm |
| Weight | 2.7g (typ.) |
| Cooling method | Free air convection |

| Isolation specifications | | | | | |
|--------------------------|-----------------------------------------------------------------|------|------|-----|-------|
| Item | Test condition | Min | Typ | Max | Units |
| Isolation voltage | Input-output, test time 1 minute, leakage current less than 1mA | 3000 | | | VDC |
| Isolation resistance | Input-output, resistance at 500VDC | 1000 | | | MΩ |
| Isolation capacitance | Input-output, 100kHz/0.1V | | 1000 | | pF |

Example:
1S7WA_2405S3RPR
 1 = 1Watt; S7 = SIP; WA = Series; 24 = 24Vin; 05 = 5Vout; S = Single Output;
 3 = 3000VDC isolation; R = Regulated Output; P = Short circuit protection;
 R = Revised

1. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage;
2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product;
3. The maximum capacitive load is tested within the input voltage range and under full load conditions;
4. Unless otherwise specified, all indicators in this datasheet are measured at Ta = 25°C, humidity <75% RH, nominal input voltage, and output rated load;
5. All testing methods in this datasheet are based on our company's standards;
6. For specific requirements please contact our technical team directly;
7. Product specifications are subject to change without prior notice.

| Output specifications | | | | | |
|------------------------------|------------------------------------------------------------|-----|------|-------|-------|
| Item | Test condition | Min | Typ | Max | Units |
| Output voltage accuracy | 0% - 100% load | | ±3.0 | ±5.0 | % |
| Linear regulation | Vin = min. to max. at full load | | ±1.0 | ±3.0 | % |
| Load regulation | 0% - 100% load | | ±3.0 | ±5.0 | % |
| Transient recovery time | 25% load step change, nominal input voltage | | 0.5 | 2 | ms |
| Transient response deviation | 25% load step change, nominal input voltage | | ±3.0 | ±5.0 | % |
| Temperature coefficient | Full load | | | ±0.03 | %/°C |
| Ripple & noise* | 20MHz bandwidth, 5% - 100% load, parallel line test method | | 50 | 100 | mVp-p |
| Over current protection | Input voltage range | 110 | 160 | | %Io |

Note: *Under 0% - 5% load conditions, ripple & noise does not exceed 5%Vo.

| Input specifications | | | | | | |
|------------------------------------|---------------------------------------------------------------------------------------|----------------------|------------------|----------------|-------|--|
| Item | Test condition | Min | Typ | Max | Units | |
| Input current (full load/ no load) | 5VDC Nominal input | | | | | |
| | • 3.3V output | | 323/15 | 333/25 | mA | |
| | • 5V output | | 308/15 | 317/25 | | |
| | • 9/12/15V output | | 286/15 | 294/25 | | |
| | • 24V output | | 267/20 | 274/40 | | |
| | 12VDC Nominal input | | | | | |
| | • 3.3V output | | 124/10 | 128/20 | | |
| | • 5V Output | | 119/10 | 123/20 | | |
| | • 9/12/15V output | | 111/15 | 114/30 | | |
| | • 24V output | | 104/15 | 107/30 | | |
| | 24VDC Nominal input | | | | | |
| | • 3.3V output | | 58/5 | 60/15 | | |
| • 5V output | | 56/5 | 57/15 | | | |
| • Others output | | 52/10 | 53/20 | | | |
| Reflected ripple current | 5VDC nominal input series 12VDC nominal input series 24VDC nominal input series | | 20 30 45 | | mA | |
| Impulse voltage (1sec. max) | 5VDC nominal input series 12VDC nominal input series 24VDC nominal input series | -0.7 -0.7 -0.7 | | 12 25 50 | VDC | |
| Starting voltage | 5VDC nominal input series 12VDC nominal input series 24VDC nominal input series | | | 4.5 9 18 | VDC | |
| Input under-voltage protection | 5VDC nominal input series 12VDC nominal input series 24VDC nominal input series | 3.5 5.5 12 | 4 6.5 15.5 | | VDC | |

1S7WA_3RPR series

1W - Single Output DC-DC Converter - Isolated & Regulated

EMC specifications

| | | | |
|-----|-------|-------------------------------------------------------------------------------|------------------|
| EMI | CE | CISPR32/EN55032 CLASS B (see fig. 3-2 for recommended circuit) | |
| EMI | RE | CISPR32/EN55032 CLASS B (see fig. 3-2 for recommended circuit) | |
| EMS | ESD | IEC/EN61000-4-2 Contact $\pm 4kV$ | Perf. criteria B |
| EMS | RS | IEC/EN61000-4-3 10V/m | Perf. criteria A |
| EMS | EFT | IEC/EN61000-4-4 $\pm 2kV$ (see fig. 3-1 for recommended circuit) | Perf. criteria B |
| EMS | Surge | IEC/EN61000-4-5 line to line $\pm 2kV$ (see fig. 3-1 for recommended circuit) | Perf. criteria B |
| EMS | CS | IEC/EN61000-4-6 3Vr.m.s | Perf. criteria A |

Product Selection Guide

| Approval | Part number | Input Voltage Nominal (Range) (VDC) | Input Voltage max. (VDC)* | Output Voltage (VDC) | Output Current max. (mA) | Full Load Efficiency (%) typ.** | Capacitive Load max. (μF) |
|----------|-----------------|-------------------------------------|---------------------------|----------------------|--------------------------|---------------------------------|----------------------------------|
| | 1S7WA_0503S3RPR | 5 (4.5-9) | 11 | 3.3 | 303 | 62 | 1200 |
| | 1S7WA_0505S3RPR | 5 (4.5-9) | 11 | 5 | 200 | 65 | 1000 |
| | 1S7WA_0509S3RPR | 5 (4.5-9) | 11 | 9 | 112 | 70 | 680 |
| | 1S7WA_0512S3RPR | 5 (4.5-9) | 11 | 12 | 84 | 70 | 560 |
| | 1S7WA_0515S3RPR | 5 (4.5-9) | 11 | 15 | 67 | 70 | 470 |
| | 1S7WA_0524S3RPR | 5 (4.5-9) | 11 | 24 | 42 | 75 | 220 |
| | 1S7WA_1203S3RPR | 12 (9-18) | 20 | 3.3 | 303 | 67 | 1200 |
| | 1S7WA_1205S3RPR | 12 (9-18) | 20 | 5 | 200 | 70 | 1000 |
| | 1S7WA_1209S3RPR | 12 (9-18) | 20 | 9 | 112 | 75 | 680 |
| | 1S7WA_1212S3RPR | 12 (9-18) | 20 | 12 | 84 | 75 | 560 |
| | 1S7WA_1215S3RPR | 12 (9-18) | 20 | 15 | 67 | 75 | 470 |
| | 1S7WA_1224S3RPR | 12 (9-18) | 20 | 24 | 42 | 80 | 220 |
| | 1S7WA_2403S3RPR | 24 (18-36) | 40 | 3.3 | 303 | 72 | 1200 |
| | 1S7WA_2405S3RPR | 24 (18-36) | 40 | 5 | 200 | 75 | 1000 |
| | 1S7WA_2409S3RPR | 24 (18-36) | 40 | 9 | 112 | 80 | 680 |
| | 1S7WA_2412S3RPR | 24 (18-36) | 40 | 12 | 84 | 80 | 560 |
| | 1S7WA_2415S3RPR | 24 (18-36) | 40 | 15 | 67 | 80 | 470 |
| | 1S7WA_2424S3RPR | 24 (18-36) | 40 | 24 | 42 | 80 | 220 |

Note: * Exceeding the maximum input voltage may cause permanent damage;

** Efficiency is measured at nominal input voltage and rated output load.

Typical characteristics

Temperature derating graph

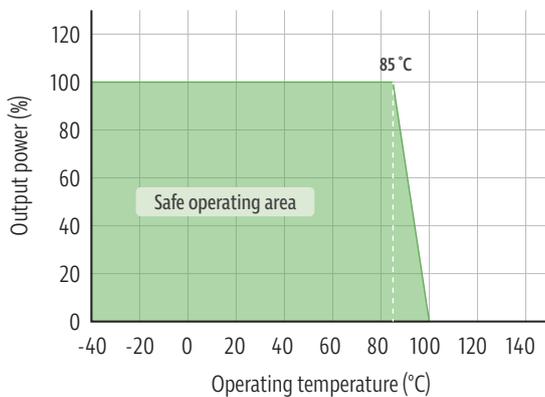



Figure 1

1S7WA_3RPR series


1W - Single Output DC-DC Converter - Isolated & Regulated

Typical characteristics

Efficiency vs input voltage
(Full load)

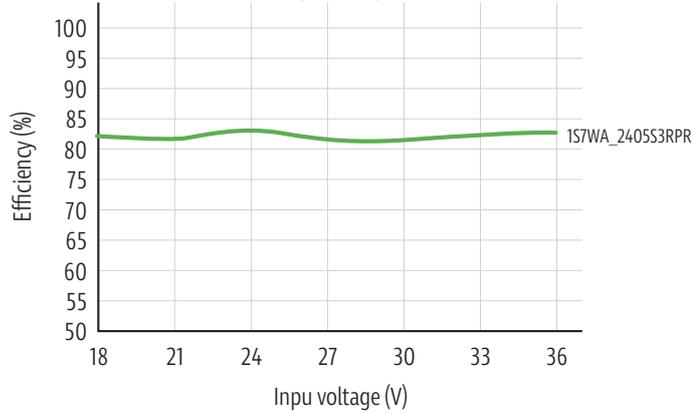

Efficiency vs output load
(Vin=24V)

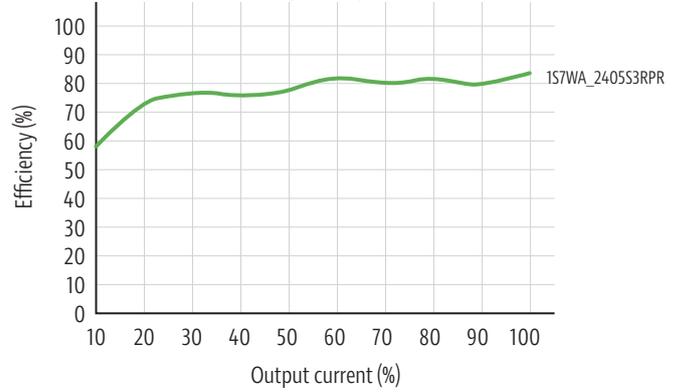

Typical circuit design and application

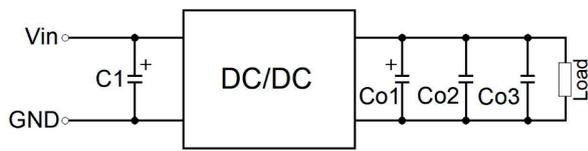


Figure 2

Recommended capacitive load value table

| Vout | C1 | Co1 | Co2 | Co3 |
|------------|------------|----------|----------|-----------|
| 3.3/5VDC | 100µF/100V | 47µF/16V | 10µF/50V | 0.1µF/16V |
| 9/12/15VDC | 100µF/100V | 47µF/25V | 10µF/50V | 0.1µF/25V |
| 24VDC | 100µF/100V | 47µF/50V | 10µF/50V | 0.1µF/50V |

All the DC-DC converters of this series are tested before delivery using the recommended circuit shown in fig. 2. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C1 and Co1/Co2/Co3 and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

Recommended EMC circuit diagram

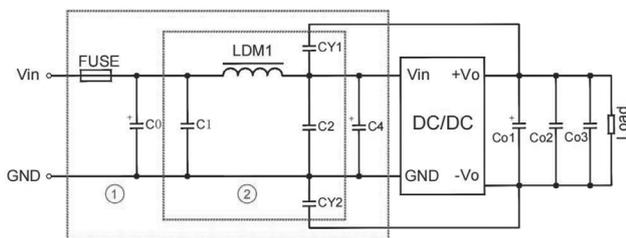


Figure 3

EMI recommended parameter table



| Model | Vin: 5VDC | Vin: 12VDC | Vin: 24VDC |
|-------------|--------------------------------------------------------------|------------|------------|
| FUSE | Select according to the actual input current of the customer | | |
| C0/C4 | 680µF/25V | 680µF/25V | 330µF/50V |
| C1/C2 | 4.7µF/50V | | |
| LDM1 | 12µH | | |
| Co1/Co2/Co3 | Refer fig. 2 capacitive load value table | | |
| CY1/CY2 | 1nF/3kV | | |

Note: We use part ① in fig. 3 for immunity tests and part ② for emissions test. Selecting based on needs.

1S7WA_3RPR series

1W - Single Output DC-DC Converter - Isolated & Regulated

Mechanical dimensions

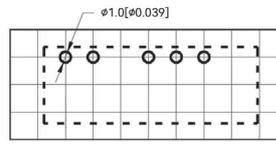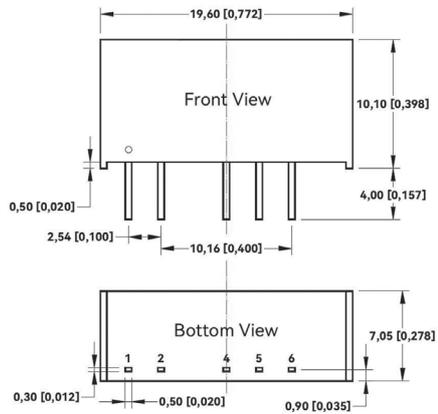

The grid distance is 2.54mm x 2.54mm

Pin definition table

| Pin | Function |
|-----|----------|
| 1 | Vin |
| 2 | GND |
| 4 | -Vo |
| 5 | No Pin |
| 6 | +Vo |

No Pin: No physical pin

Note:
Unit: mm [inch]
Pin section tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.50 [± 0.020]