



30DBMW4_6 series

30W - Single/Dual Output DC-DC Converter - Wide Input - Isolated & Regulated

DC-DC Converter 30 Watt

- ⊕ 4:1 input voltage range
- ⊕ 5000VAC isolation
- ⊕ Reinforced isolation for 250Vrms working voltage
- ⊕ Up to 89% efficiency
- ⊕ Under voltage protection
- ⊕ Remote on/off control
- ⊕ Adjustable output voltage
- ⊕ Short circuit protection (SCP)
- ⊕ Over load protection
- ⊕ Over voltage protection
- ⊕ Over temperature protection

Introducing our new 30DBMW4_6 series, a high-performance DC-DC converter engineered for applications requiring maximum safety, flexibility, and efficiency. Featuring a wide 4:1 input voltage range, it adapts seamlessly to varying supply conditions while ensuring stable and reliable operation. With 5000 VAC isolation and reinforced isolation for a 250 Vrms working voltage, the 30DBMW4_6 series is designed to meet stringent safety and insulation requirements. Delivering efficiency levels of up to 89%, it supports energy-efficient system designs without compromising performance. Comprehensive protection features are integrated as standard, including input undervoltage protection, short-circuit protection (SCP), overload protection, overvoltage protection, and overtemperature protection, ensuring robust operation under all conditions. Additional functionality such as remote on/off control and adjustable output voltage provides designers with enhanced control and system-level flexibility.



Common specifications	
Short circuit protection	Indefinite (hiccup - automatic recovery)
Over temperature protection	115°C (typ.) case temperature
Switching frequency	275 kHz
Operation temperature	-40°C ~+100°C (with derating)
Storage temperature	-55°C ~+125°C
Soldering temperature*	260°C (1.5mm from case 10sec max.)
Maximum case temperature	105°C
Thermal impedance	10°C/W
Storage humidity	95% RH
MTBF: (MIL-HDBK-217F@25°C)	250,000 hours
Input filter	Pi Type
Cooling	30-65 LFM (natural convection)
Leakage current	2.0µA (240VAC, 60Hz)
Clearance/creepage	8mm (input-output)
Safety standard	IEC / EN / UL 62368-1, DK-136001-UL, E252573
Insulation system	Reinforced Isolation
Case material	Non conductive Black Plastic (UL94V-0 rated)
Base material	Non conductive Black Plastic (UL94V-0 rated)
Pin material	Φ1.0mm brass solder-coated
Potting material	Silicone (UL94V-0 rated)
Weight	30 g, typ.
Dimensions	2.00" x 1.00" x 0.40"

Note: *These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation Voltage	Input-output, and rated for 60sec	5000			VAC
Isolation Resistance	Input-output	1000			MΩ
Isolation Capacitance	Input-output		20		pF

Example:
30DBMW4_2405S6
 30 = 30Watt; D = DIP; BM = Series; W4 = Wide input; 24 = 24Vin; 05 = 5Vout;
 S = Single Output; 6 = 6000VDC isolation

Output specifications					
Item	Test condition	Min	Typ	Max	Units
Voltage accuracy		-1.0		+1.0	%
Voltage adjustability (trim)	Single output	-10		+10	%
Line regulation	Single output	-0.2		+0.2	%
	Dual output	-0.5		+0.5	
Load regulation (from 0% to 100% load)	Single output	-0.5		+0.5	%
	Dual output	-1.0		+1.0	
Cross regulation	Asymmetrical load 25% / 100% for dual output	-5		+5	%
Ripple & noise (20mhz bandwidth)*	5V output		50		mVpk-pk
	12V & 15V output		75		
Over voltage protection (zener diode clamp)	5V output		6.2		VDC
	12V output		15		
	15V output		18		
Over current protection			150		% of FL
Temperature coefficient		-0.02		+0.02	%/°C
Capacitive load	Minimum Vin and constant resistive load				See Table
Transient recovery time**			250		µs
Transient response deviation**	5V Output		5		%
	12V & 15V Output		3		

Note: *Measured With a 10µF MLCC.

**Nominal Vin and 25% load step change (75% - 50% - 25% of Io)

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Input voltage range	24V Input	9	24	36	VDC
	48V Input	18	48	75	
Under voltage lockout	24V Input, module ON		8.2		VDC
	24V Input, module OFF		7.5		
	48V Input, module ON		17.4		
	48V Input, module OFF		16.0		
Input reflected ripple current*			20		mApk-pk
Start up time	Nominal Vin and constant resistive load		20		ms
Remote on/off control**	• Module ON (open circuit)	3.0		12	VDC
	• Module OFF (short circuit pin 2 and pin 6)	0		1.2	VDC
	• OFF idle current		2.5		mA
	• CTRL pin input current			1.0	mA
Recommended input fuse (slow blow)	24V Input		6.3		A
	48V Input		3.15		
Input surge voltage (100 ms)***	24V Input			50	VDC
	48V Input			100	

Note: *Measured with a simulated source inductance of 12µH and a source capacitor Cin (47µF, ESR<1.0Ω at 100 kHz).

**The remote on/off control pin is referenced to -Vin (pin2).

***These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

30DBMW4_6 series

30W - Single/Dual Output DC-DC Converter - Wide Input - Isolated & Regulated

EMC specifications					
EMC	EMI	CE	EN55032	without external components	Criterion A
EMC	EMI	RE	EN55032	without external components	Criterion A
EMC	EMS	ESD	IEC 61000-4-2	Air $\pm 15\text{kV}$ / Indirect $\pm 6\text{kV}$	Criterion A
EMC	EMS	RS	IEC 61000-4-3	10V/m	Criterion A
EMC	EMS	EFT	IEC 61000-4-4	$\pm 2\text{kV}$ with external components	Criterion A
EMC	EMS	Surge	IEC 61000-4-5	$\pm 2\text{kV}$ with external components	Criterion A
EMC	EMS	CS	IEC 61000-4-6	10Vrms	Criterion A
EMC	EMS	PFMF	IEC 61000-4-8	100A/m	Criterion A


Product Selection Guide

Approval	Part number	Input Voltage Range (VDC)	Input Current No-Load (mA, Max.)	Input Current Full Load (mA, Typ.)	Output Voltage (VDC)	Output Current Min. load (mA)	Output Current Full load (mA)	Full Load Efficiency (%) typ.	Capacitive Load (μF) max.
	30DBMW4_2405S6	9-36	15	1453	5	0	6000	86	7200
	30DBMW4_2412S6	9-36	15	1437	12	0	2500	87	1200
	30DBMW4_2415S6	9-36	15	1404	15	0	2000	89	1000
	30DBMW4_4805S6	18-75	15	718	5	0	6000	87	7200
	30DBMW4_4812S6	18-75	15	710	12	0	2500	88	1200
	30DBMW4_4815S6	18-75	15	702	15	0	2000	89	1000


Approval	Part number	Input Voltage Range (VDC)	Input Current No-Load (mA, Max.)	Input Current Full Load (mA, Typ.)	Output Voltage (VDC)	Output Current Min. load (mA)	Output Current Full load (mA)	Full Load Efficiency (%) typ.	Capacitive Load (μF) max.
	30DBMW4_2405D6	9-36	15	1488	± 5	0	± 3000	84	± 3600
	30DBMW4_2412D6	9-36	15	1437	± 12	0	± 1250	87	± 750
	30DBMW4_2415D6	9-36	15	1404	± 15	0	± 1000	89	± 500
	30DBMW4_4805D6	18-75	15	744	± 5	0	± 3000	84	± 3600
	30DBMW4_4812D6	18-75	15	718	± 12	0	± 1250	87	± 750
	30DBMW4_4815D6	18-75	15	702	± 15	0	± 1000	89	± 500

Typical characteristics

Temperature derating graph
(Dual Output 5V Models)

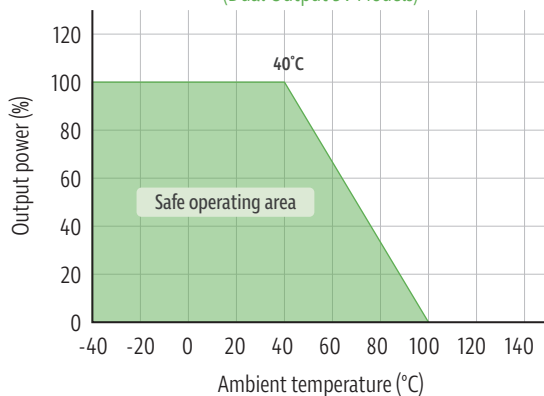

Temperature derating graph
(Single Output 5V Models)

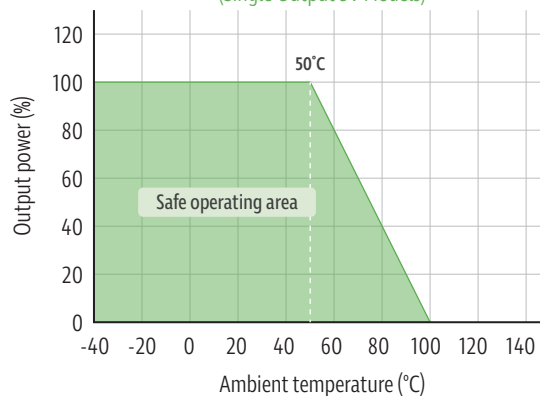


30DBMW4_6 series


30W - Single/Dual Output DC-DC Converter - Wide Input - Isolated & Regulated

Typical characteristics

Temperature derating graph
(Single & Dual Output 12V Models)

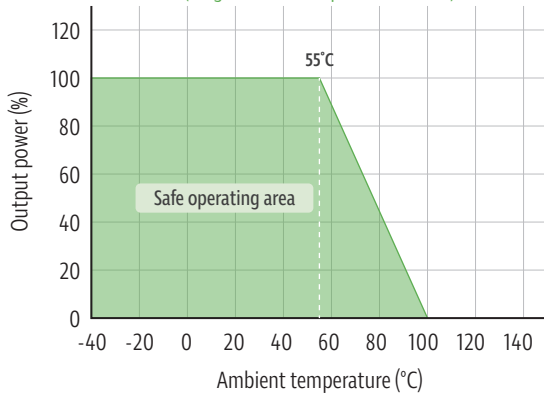


Temperature derating graph
(Single & Dual Output 15V Models)

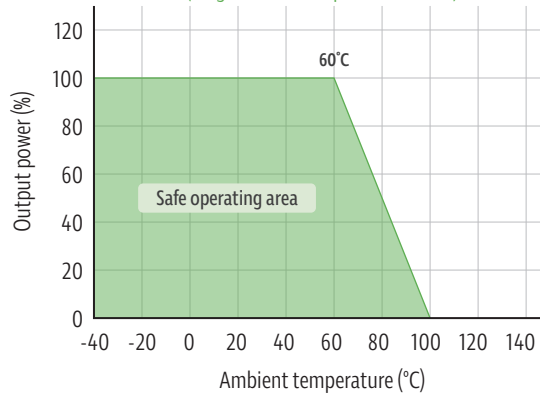

Typical circuit design and application

Input reflected ripple current is measured with a source inductor L_{in} (12μH) and a source capacitor C_{in} (47μF, ESR<1.0Ω at 100kHz) at nominal input and full

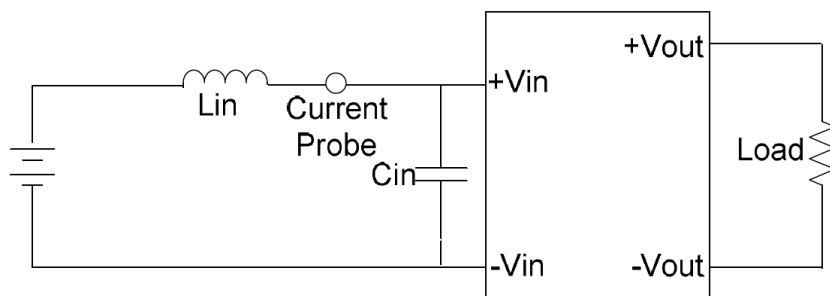

Over Current Protection

The module includes an internal over current protection circuit, which will endure current limiting for an unlimited duration during output over load condition. If the output current exceeds the OCP set point, the module will shut down automatically (hiccup). The module will try to restart after shut down. If the over load condition still exists, the module will shut down again.

Over Voltage Protection

The module includes an internal output over voltage protection circuit, which monitors the voltage on the output terminals. If this voltage exceeds the over voltage set point, the module will activate the control loop of internal circuit to clamp the output voltage.

Over Temperature Protection Test


The over temperature protection consists of circuitry that provides protection from thermal damage. If the temperature exceeds the over temperature threshold the module will shut down. The module will try to restart after shut down, if the over temperature condition still exists during restart, the module will shut down again. This restart trial will continue until the temperature is within specification.

Remote Module ON / OFF

Positive logic turns on the module during high logic and off during low logic. Remote module on/off can be controlled by an external switch between the CTRL terminal and -Vin terminal. For positive logic if the remote feature is not used, please leave the CTRL pin floating.

EMI recommended component parameters

The circuit is used to meet surge & EFT test.

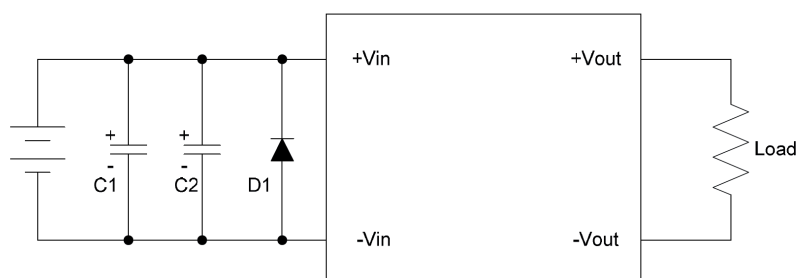


	C1, C2 (NIPPON Chemi-con KY Series)	D1
24V	470uF, 100V	SMDJ58A
48V	220uF, 100V	SMDJ120A

30DBMW4_6 series


30W - Single/Dual Output DC-DC Converter - Wide Input - Isolated & Regulated

Mechanical dimensions

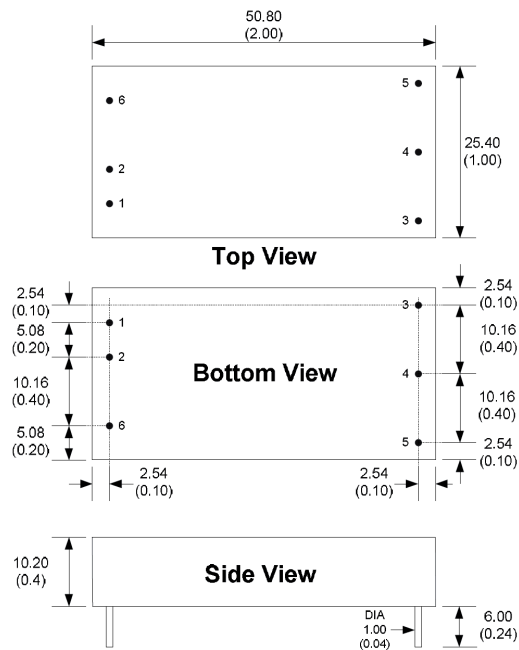


Pin Definition Table		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	-Vout	COM
5	Trim	-Vout
6	CTRL	CTRL

EXTERNAL OUTPUT TRIMMING
 Output can be externally trimmed by using the method as below. (single output models only)

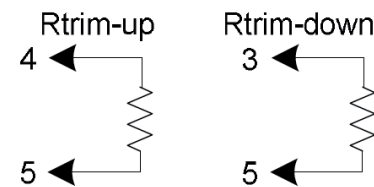

Notes:
 All dimensions are typical in millimeters (inches).
 Pin diameter: 1.0±0.05 (0.02±0.002)
 Pin pitch and length tolerance: ±0.35 (±0.014)
 Case Tolerance: ±0.5 (±0.02)

Recommend footprint details

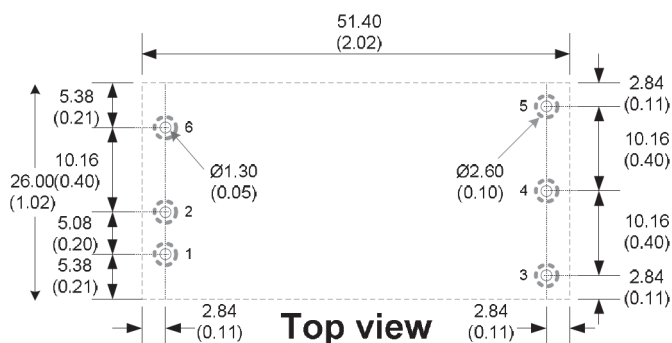

Notes:
 1. All dimensions are typical in mm (inches).
 Through hole 1 ~ 6: Ø 1.30 (0.051)
 Top view pad 1 ~ 6: Ø 1.50 (0.059)
 Bottom view pad 1 ~ 6: Ø 2.60 (0.102)
 2. There should be at least 8mm distance between primary and secondary circuit.