

LMTOW78_0.5 series

Wide input, non-isolated & regulated, single output, SMD package



Switching Regulator

- Short circuit protection (SCP)
- SMD package, full SMD technology
- Efficiency up to 92%
- High voltage input range, up
- Remote ON/OFF control
- Operating ambient temperature range: -40°C ~ +105°C
- Excellent line/load regulation RoHS compliance

The LMTOW78 0.5 series are high efficiency switching regulators. The converters feature high efficiency, low loss and short-circuit protection in a compact SMD package. These products are widely used in applications such as industrial control, instrumentation and electric power.





CE

Common specifications	
Cooling:	Nature convection
Short circuit protection:	Continuous, automatic recovery
Operating temperature range:	-40°C ~ +105°C -40°C ~ +60°C (for 100% load)
Storage temperature range:	-55°C ~ +125°C
Reflow soldering temperature:	260°C, MAX Peak temp. ≤245°C, maximum duration time ≤10s. For actual application, please refer to IPC/JEDEC J-STD-020D.1.
Storage humidity range:	< 95%
Safety standard:	IEC/EN 60950-1, 62368-1
Case material:	Plastic [UL94-V0]
MTBF (MIL-HDBK-217F,+25°C):	> 4,800,000 hours
Package weight:	1.8g
Dimensions:	1.96 x 1.19 x 0.50mm

Input specifications					
Item	Test conditions	Min	Тур	Max	Units
Start up time	nominal Vin and constant resistive load		10		ms
Input filter	Capacitors				
Input reflected ripple current*			35		mApk-pk
Surge voltage	100ms			75	VDC
Remote ON/OFF CTRL*	• ON • OFF • OFF Idle current		circuit circuit CT	RL (pin 1	10) and
				1	mA

- Measured through a source indicator L1 (12μH) and a source capacitor C1=10μF at nominal input and full load.
- ** The remote ON/OFF pin is referenced to GND.

Item	Test conditions	Min	Тур	Max	Units
Voltage accuracy				±2	%
Voltage adjustability	input voltage range			±10	%
Line regulation				±1	%
Load regulation				±1	%
Ripple + Noise*	20MHz bandwidth			75	mVpk-pk
Temperature coefficient				±0.02	%/°C
Transient recovery time	Normal Vin, 25% load step change		250		μs
Transient response deviation	Normal Vin, 25% load step change			±3	%
Switching			150~55	0	KHz

Output specifications

EMC specifications

CE*

ESD

EFT**

Surge**

RS

CS

the input pins.

IEC61000-4-5.

PFMF

EMI

EMI

EMS

 ${\sf EMS}$

EMS

EMS

EMS

EMS

* Measured with a 0.1µF ceramic capacitor & 10µF electrolytic capacitor.

CISPR32/EN55032

CISPR32/EN55032

IEC/EN61000-4-2

IEC/EN61000-4-3

IEC/EN61000-4-4

IEC/EN61000-4-5

IEC/EN61000-4-6

IEC/EN61000-4-8

* The series can meet EN55032 Class B with an external filter in parallel with

* An external filter is required if the module has to meet IEC61000-4-4 &

CLASS B

CLASS B

perf. Criteria A

Input specifications					
Item	Test conditions	Min	Тур	Max	Units
Start up time	nominal Vin and con- stant resistive load		10		ms
Input filter	Capacitors				
Input reflected ripple current*			35		mApk-pk
Surge voltage	100ms			75	VDC
Remote ON/OFF CTRL*	• ON • OFF • OFF Idle current		circuit circuit C	TRL (pin	10) and
				1	mA

- 1. All specifications measured at Ta = 25°C, humidity <75%, nominal input voltage and rated output load unless otherwise specified.
- 2. In this datasheet, all the test methods of indications are based on corporate standards.

LMTOW78_05-0.5

LM = Series; T = SMT case; O = Open frame; W = Wide input;


05 = 5Vout; 0.5 = 0.5A


LMTOW78 0.5 series

Wide input, non-isolated & regulated, single output, SMD package

Part Number	Input Volt Nominal	age [VDC] Range	Output Voltage [VDC]	Output Current [mA, Max]	Capacitive load [μF, max]	Efficiency [Vin. max]
LMTOW78_03-0.5	48	9-72	3.3	500	100	70
LMTOW78_05-0.5	48	9-72	5	500	100	74
LMTOW78_06-0.5	48	9-72	6.5	500	100	78
LMTOW78_07-0.5	48	14-72	7.2	500	100	81
LMTOW78_09-0.5	48	14-26	9	500	100	84
LMTOW78_12-0.5	48	17-72	12	500	100	86
LMTOW78_15-0.5	48	21-72	15	400	100	84

Typical characteristics

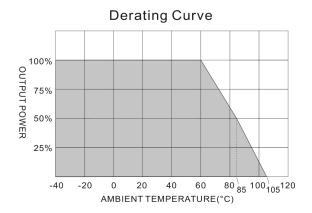

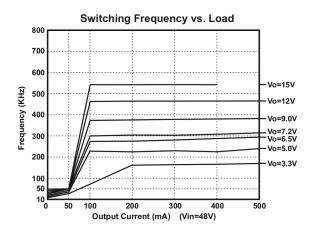

The switching frequency is different according to output voltage models.


Test configurations


Input reflected ripple current test step

Input reflected ripple current is measured though a source inductor Lin (12 μ H) and a source capacitor Cin (10 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

Output ripple & noise measurement test

Use a capacitor Cout (1.0 μ F) measurement. The scope measurement bandwidth ist 0-20MHz.



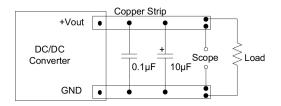


Design configurations


Remote ON/OFF test step

Input filter components (C1, C2, L1, C3, C4) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.


Output voltage adjustment

Pin 6 via a resistor to +Vout (pin5), Vo trim down. Pin 6 via a resistor to GND (pin 7), Vo trim up.

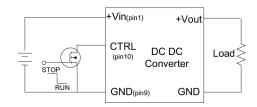



Standard application circuit

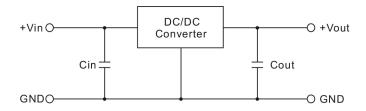


- 1. Cin is required and must be connected close to the pin terminal of the module. (Cin=10μF).
- 2. Cout= 10µF (optional)

EMC countermeasures


EMI countermeasures

Input filter components (C1, C2, L1, C3, C4) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

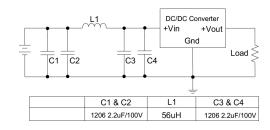


EFT & Surge test countermeasures

The filter we suggest: Nippon - chemi - con KY series, 330μF/100V and TVS, 3KW, 70V



Mechanical dimensions

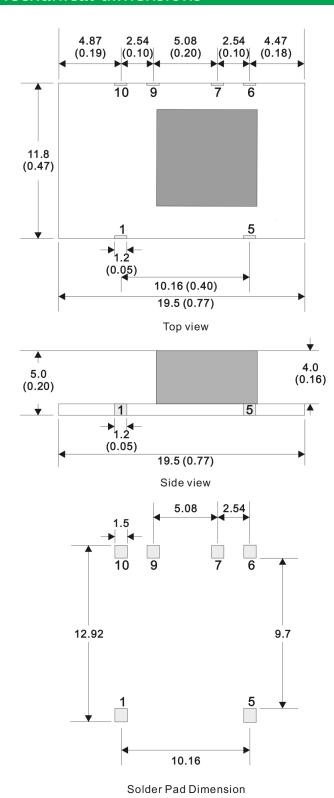

	4.47 2.54 (0.18) (0.10		2.54 (0.10		
	6	7	9	10	
11.8 (0.47)					9.
	5			1	
	1.2 (0.05)	10.16 (0.4	0)	•	
	•	19.5 (0.77			
		Bottom vie	W		

PIN CONNECTIONS				
PIN NUMBER	SINGLE			
1	+ V Input			
5	+V Output			
6	Trim			
7	GND			
9	GND			
10	CTRL			

Notes : All dimensions are typical in millimeters (inches 1. Pin pitch tolerances: ± 0.25 (± 0.01) 2. Pin profile tolerance: ± 0.1 (± 0.004) 3. Other tolerances: ± 0.5 (± 0.02)